1 Input Parameters

Module	Tension Member Welded
Axial Force (kN)	330.0
Length (mm) *	2200.0
Section Profile*	Back to Back Angles
Section Size*	Ref List of Input Section
Plate Details - Input and Design Preference	
Thickness (mm)	[10, 12, 14, 16, 20]
Material	E 250 (Fe 410 W)A
Ultimate Strength, Fu (MPa)	410
Yield Strength, Fy (MPa)	240
Weld Details - Input and Design Preference	
Weld Type	Fillet
Type of Weld Fabrication	Shop Weld
Material Grade Overwrite, f_u (MPa)	410.0

1.1 List of Input Section

Section Size*	'20 x 20 x 3', '20 x 20 x 4', '25 x 25 x 3', '25 x 25 x 4', '25 x 25 x 5', '30 x 30 x 3', '30 x 30 x 4', '30 x 30 x 5', '35 x 35 x 3', '35 x 35 x 4', '35 x 35 x 5', '35 x 35 x 6', '40 x 40 x 3', '40 x 40 x 4', '40 x 40 x 5', '40 x 40 x 6', '45 x 45 x 3', '45 x 45 x 4', '45 x 45 x 5', '45 x 45 x 6', '50 x 50 x 3', '50 x 50 x 4', '50 x 50 x 5', '50 x 50 x 6', '55 x 55 x 4', '55 x 55 x 5', '55 x 55 x 6', '55 x 55 x 8', '60 x 60 x 4', '60 x 60 x 5', '60 x 60 x 6', '60 x 60 x 8', '65 x 65 x 4', '65 x 65 x 5', '65 x 65 x 6', '65 x 65 x 8', '70 x 70 x 5', '70 x 70 x 6', '70 x 70 x 8', '70 x 70 x 10', '75 x 75 x 5', '75 x 75 x 6', '75 x 75 x 8', '75 x 75 x 10', '80 x 80 x 6', '80 x 80 x 8', '80 x 80 x 10', '80 x 80 x 12', '90 x 90 x 6', '90 x 90 x 8', '90 x 90 x 10', '90 x 90 x 12', '100 x 100 x 6', '100 x 100 x 8', '100 x 100 x 10', '100 x 100 x 12', '110 x 110 x 8', '110 x 110 x 10', '110 x 110 x 12', '110 x 110 x 16', '130 x 130 x 8', '130 x130 x 10', '130 x130 x 12', '130 x130 x 16', '150 x 150 x 10', '150 x 150 x 12', '150 x 150 x 16', '150 x 150 x 20', '200 x 200 x 12', '200 x 200 x 16', '200 x 200 x 20', '200 x 200 x 25', '50 x 50 x 7', '50 x 50 x 8', '55 x 55 x 10', '60 x 60 x 10', '65 x 65 x 10', '70 x 70 x 7', '100 x 100 x 7', '100 x 100 x 15', '120 x 120 x 8', '120 x 120 x 10', '120 x 120 x 12', '120 x 120 x 15', '130 x 130 x 9', '150 x 150 x 15', '150 x 150 x 18', '180 x 180 x 15', '180 x 180 x 18', '180 x 180 x 20', '200 x 200 x 24', '30 x 20 x 3', '30 x 20 x 4', '30 x 20 x 5', '40 x 25 x 3', '40 x 25 x 4', '40 x 25 x 5', '40 x 25 x 6', '45 x 30 x 3', '45 x 30 x 4', '45 x 30 x 5', '45 x 30 x 6', '50 x 30 x 3', '50 x 30 x 4', '50 x 30 x 5', '50 x 30 x 6', '60 x 40 x 5', '60 x 40 x 6', '60 x 40 x 8', '65 x 45 x 5', '65 x 45 x 6', '65 x 45 x 8', '70 x 45 x 5', '70 x 45 x 6', '70 x 45 x 8', '70 x 45 x 10', '75 x 50 x 5', '75 x 50 x 6', '75 x 50 x 8', '75 x 50 x 10', '80 x 50 x 5', '80 x 50 x 6', '80 x 50 x 8', '80 x 50 x 10', '90 x 60 x 6', '90 x 60 x 8', '90 x 60 x 10', '90 x 60 x 12', '100 x 65 x 6', '100 x 65 x 8', '100 x 65 x 10', '100 x 75 x 6', '100 x 75 x 8', '100 x 75 x 10', '100 x 75 x 12', '125 x 75 x 6', '125 x 75 x 8', '125 x 75 x 10', '125 x 95 x 6', '125 x 95 x 8', '125 x 95 x 10', '125 x 95 x 12', '150 x 115 x 8', '150 x 115 x 10', '150 x 115 x 12', '150 x 115 x 16', '200 x 100 x 10', '200 x 100 x 12', '200 x 100 x 16', '200 x 150 x 10', '200 x 150 x 12', '200 x 150 x 16', '200 x 150 x 20', '40 x 20 x 3', '40 x 20 x 4', '40 x 20 x 5', '60 x 30 x 5', '60 x 30 x 6', '60 x 40 x 7', '65 x 50 x 5', '65 x 50 x 6', '65 x 50 x 7', '65 x 50 x 8', '70 x 50 x 5', '70 x 50 x 6', '70 x 50 x 7', '70 x 50 x 8', '75 x 50 x 7', '80 x 40 x 5', '80 x 40 x 6', '80 x 40 x 7', '80 x 40 x 8', '80 x 60 x 6', '80 x 60 x 7', '80 x 60 x 8', '90 x 65 x 6', '90 x 65 x 7', '90 x 65 x 8', '90 x 65 x 10', '100 x 50 x 6', '100 x 50 x 7', '100 x 50 x 8', '100 x 50 x 10', '100 x 65 x 7', '120 x 80 x 8', '120 x 80 x 10', '120 x 80 x 12', '125 x 75 x 12', '135 x 65 x 8', '135 x 65 x 10', '135 x 65 x 12', '150 x 75 x 9', '150 x 75 x 15', '150 x 90 x 10', '150 x 90 x 12', '150 x 90 x 15', '200 x 100 x 15', '200 x 150 x 15', '200 x 150 x 18'

Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.2
Date	18 /12 /2020	Client	Yogesh D Pisal, Aker Powergas, Mumbai

2 Design Checks

Design Status	Fail

2.1 Selected Member Data

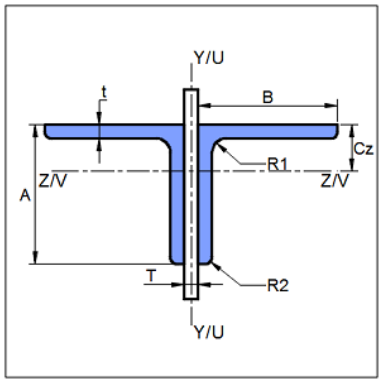

Section Size*		('75 x 75 x 5', 'Back to Back Angles')	
Material		E 250 (Fe 410 W)A	
Mass, m (kg/m)		11.54	
Area, A (cm^2)		1472.0	
A (mm)	75.0	I_v(cm^4)	80.0
B (mm)	75.0	r_z (cm)	2.33
t (mm)	5.0	r_y (cm)	3.1
T (mm)	20.0	r_u (cm)	3.1
R_1 (mm)	7.0	r_v (cm)	2.33
R_2 (mm)	0.0	Z_z (cm^3)	14.65
C_y (mm)	N/A	Z_y (cm^3)	18.83
C_z (mm)	20.4	Z_{pz} (cm^3)	26.4
I_z (cm^4)	80.0	Z_{py} (cm^3)	30.32
I_y(cm^4)	141.26	Radius of gyration, r (cm)	58.3
I_u (cm^4)	141.26		

2.2 Member Check

Check	Required	Provided	Remarks
Tension Yielding Capacity (kN)		$T_{dg} = \frac{A_g f_y}{\gamma_{mo}}$ $= \frac{736.0 \times 250}{1.1 \times 10^3}$ $= 334.55$ [$Ref.$ IS 800 : 2007, $Cl.$ 6.2]	

Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.2
Date	18 /12 /2020	Client	Yogesh D Pisal, Aker Powergas, Mumbai

Check	Required	Provided	Remarks
Tension Rupture Capacity (kN)		$\beta = 1.4 - 0.076 \times \frac{w}{t} \times \frac{f_y}{0.9 f_u} \times \frac{b_s}{L_c}$ $\leq \frac{0.9\ f_u\ \gamma_{m0}}{f_y\ \gamma_{m1}} \geq 0.7$ $= 1.4 - 0.076 \times \frac{75.0}{5.0} \times \frac{250}{0.9 \times 410} \times \frac{75.0}{164}$ $\leq \frac{0.9 \times 410 \times 1.1}{250 \times 1.25} \geq 0.7$ $= 1.05$ $T_{dn} = 2 \times (\frac{0.9 A_{nc} f_u}{\gamma_{m1}} + \frac{\beta A_{go} f_y}{\gamma_{m0}})$ $= 2 \times (\frac{0.9 \times 350.0 \times 410}{1.25} + \frac{1.05 \times 375.0 \times 250}{1.1})$ $= 385.62$ [$Ref.\ IS\ 800:2007,\ Cl.\ 6.3.3$]	
Tension Capacity (kN)	330.0	$T_d = min(T_{dg}, T_{dn})$ $= min(334.55, 385.62)$ $= 334.55$ [$Ref.\ IS\ 800:2007,\ Cl.\ 6.1$]	**Pass**
Slenderness	$\frac{KL}{r} \leq 400$	$\frac{KL}{r} = \frac{1 \times 2200.0}{58.3}$ $= 37.74$ [$Ref.\ IS\ 800:2007,\ Cl.\ 7.1.2$]	**Pass**
Utilization Ratio	≤ 1	$Utilization\ Ratio = \frac{F}{T_d} = \frac{330.0}{334.55}$ $= 0.99$	

Check	Required	Provided	Remarks
Axial Load Considered (kN)	$Ac_{min} = 0.3A_c$ $= 0.3 \times 334.55$ $= 100.36$ $Ac_{max} = 334.55$ [$Ref.\ IS\ 800:2007,\ Cl.\ 10.7$]	$A = 330.0$	**Pass**

2.3 Weld Design

Check	Required	Provided	Remarks
Min. Weld Size (mm)	$t_{w_{min}}$ *based on thinner part* $= 5$ *or* 3 s_{min} *based on thicker part* $= 5$ [$Ref\ IS\ 800:2007, Table\ 21\ (Cl 10.5.2.3)$]	5	**Pass**
Max. Weld Size (mm)	*Thickness of thinner part* $= min(20.0, 5.0) = 5.0$ $s_{max} = 16.0$ [$Ref.\ IS\ 800:2007,\ Cl.\ 10.5.3.1$]	5	**Pass**
Throat Thickness (mm)	$t_t \geq 3$ [$Ref.\ IS\ 800:2007,\ Cl.\ 10.5.3.1$]	$t_t = 0.7t_w$ $= 0.7 \times 5$ $= 3.5$ [$Ref.\ IS\ 800:2007,\ Cl.\ 10.5.3.1$]	**Pass**
Effective Length (mm)		$l_w = 726.0$	

Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.2
Date	18 /12 /2020	Client	Yogesh D Pisal, Aker Powergas, Mumbai

Check	Required	Provided	Remarks
Weld Strength (N/mm)	$R_w = \sqrt{(A_{wh})^2 + (V_{wv})^2}$ $V_{wv} = \frac{V}{l_w} = \frac{0.0}{726.0}$ $A_{wh} = \frac{A}{l_w} = \frac{330000.0}{726.0}$ $R_w = \sqrt{(454.55)^2 + (0.0)^2}$ $= 454.55$	$f_w = \frac{t_t \ f_u}{\sqrt{3}\ \gamma_{mw}}$ $= \frac{3.5 \times 410}{\sqrt{3} \times 1.25}$ $= 662.8$ $[Ref.\ IS\ 800 : 2007,\ Cl.\ 10.5.7.1.1]$	**Pass**
Weld Strength (post long joint) (N/mm)	$if\ l \geq 150t_t\ then\ V_{rd} = \beta_{l_w} V_{db}$ $if\ l < 150t_t\ then\ V_{rd} = V_{db}$ $where,$ $l\ = pt.length\ or\ pt.height$ $\beta_{l_w} = 1.2 - \frac{(0.2l)}{(150t_t)}$ $but\ 0.6 \leq \beta_{l_w} \leq 1.0$ $[Ref.\ IS\ 800 : 2007,\ Cl.\ 10.5.7.3]$	$l\ = pt.length\ or\ pt.height$ $l_l = max(105.0, 179)$ $= 179$ $150t_t = 150 \times 3.5 = 525.0$ $since,\ l < 150t_t$ $then\ f_{wrd} = f_w$ $f_{wrd} = 662.8$ $[Ref.\ IS\ 800 : 2007,\ Cl.\ 10.5.7.3]$	
Weld Strength (N/mm)	454.55	662.8	**Pass**

2.4 Gusset Plate Check

Check	Required	Provided	Remarks
Tension Yielding Capacity (kN)	330.0	$T_{dg} = \frac{A_g f_y}{\gamma_{mo}}$ $A_g = l \times t = 200.0 \times 20.0$ $= \frac{4000.0 \times 240}{1.1 \times 10^3}$ $= 327.27$ $[Ref.\ IS\ 800 : 2007,\ Cl.\ 6.2]$	**Fail**

Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.2
Date	18 /12 /2020	Client	Yogesh D Pisal, Aker Powergas, Mumbai

Check	Required	Provided	Remarks
Min.Height (mm)		$H = 1 \times Depth + clearance$ $= (1 \times 200.0) + 30$ $= 105.0$	
Min.Plate Length (mm)		$L = Flangeweld + clearance$ $= 149 + 30$ $= 179$	**Pass**
Min.Member Length (mm)	358	2200.0	**Pass**
Thickness (mm)		$T = 20.0$	
Weld Strength (N/mm)	$R_w = \sqrt{(A_{wh})^2 + (V_{wv})^2}$ $V_{wv} = \frac{V}{l_w} = \frac{0.0}{726.0}$ $A_{wh} = \frac{A}{l_w} = \frac{330000.0}{726.0}$ $R_w = \sqrt{(454.55)^2 + (0.0)^2}$ $= 454.55$	$f_w = \frac{t_t \ f_u}{\sqrt{3} \ \gamma_{mw}}$ $= \frac{3.5 \times 410}{\sqrt{3} \times 1.25}$ $= 662.8$ $[Ref.\ IS\ 800:2007,\ Cl.\ 10.5.7.1.1]$	**Pass**
Block Shear Capacity (kN)		$T_{dbl1} = \frac{A_{vg} f_y}{\sqrt{3}\gamma_{m0}} + \frac{0.9 A_{tn} f_u}{\gamma_{m1}}$ $T_{dbl2} = \frac{0.9 A_{vn} f_u}{\sqrt{3}\gamma_{m1}} + \frac{A_{tg} f_y}{\gamma_{m0}}$ $T_{db} = min(T_{db1}, T_{db2}) = 944.53$ $[Ref.\ IS\ 800:2007,\ Cl.\ 6.4]$	
Tension Capacity (kN)	$A = 330.0$	$T_d = min(T_{dg}, T_{db})$ $= min(327.27, 944.53)$ $= 327.27$ $[Ref.\ IS\ 800:2007,\ Cl.\ 6.1]$	**Pass**

3 Design Log

02:06:21 - osdag - WARNING - : The factored tension force (330.0 kN) exceeds the tension capacity of 909.09 kN with respect to the maximum available plate thickness of 20.0 mm.

02:06:21 - osdag - ERROR - :Design is unsafe.

02:06:21 - osdag - ERROR - : Design is not safe.

02:06:21 - osdag - INFO - :==========End Of design==========