



Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.1
Date	18 /12 /2020	Client	S R Satish Kumar, Professor, IIT Madras

1 Input Parameters

Module	Tension Member Welded
Axial Force (kN)	235.0
Length (mm) *	2560.0
Section Profile*	Angles
Section Size*	Ref List of Input Section
Plate Details - Input and Design Preference	
Thickness (mm)	[10, 12, 14, 16]
Material	E 250 (Fe 410 W)A
Ultimate Strength, F_u (MPa)	410
Yield Strength, F_y (MPa)	250
Weld Details - Input and Design Preference	
Weld Type	Fillet
Type of Weld Fabrication	Field weld
Material Grade Overwrite, f_u (MPa)	450.0



Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.1
Date	18 /12 /2020	Client	S R Satish Kumar, Professor, IIT Madras

1.1 List of Input Section

Section Size*	'20 x 20 x 3', '20 x 20 x 4', '25 x 25 x 3', '25 x 25 x 4', '25 x 25 x 5', '30 x 30 x 3', '30 x 30 x 4', '30 x 30 x 5', '35 x 35 x 3', '35 x 35 x 4', '35 x 35 x 5', '35 x 35 x 6', '40 x 40 x 3', '40 x 40 x 4', '40 x 40 x 5', '40 x 40 x 6', '45 x 45 x 3', '45 x 45 x 4', '45 x 45 x 5', '45 x 45 x 6', '50 x 50 x 3', '50 x 50 x 4', '50 x 50 x 5', '50 x 50 x 6', '55 x 55 x 4', '55 x 55 x 5', '55 x 55 x 6', '55 x 55 x 8', '60 x 60 x 4', '60 x 60 x 5', '60 x 60 x 6', '60 x 60 x 8', '65 x 65 x 4', '65 x 65 x 5', '65 x 65 x 6', '65 x 65 x 8', '70 x 70 x 5', '70 x 70 x 6', '70 x 70 x 8', '70 x 70 x 10', '75 x 75 x 5', '75 x 75 x 6', '75 x 75 x 8', '75 x 75 x 10', '80 x 80 x 6', '80 x 80 x 8', '80 x 80 x 10', '80 x 80 x 12', '90 x 90 x 6', '90 x 90 x 8', '90 x 90 x 10', '90 x 90 x 12', '100 x 100 x 6', '100 x 100 x 8', '100 x 100 x 10', '100 x 100 x 12', '110 x 110 x 8', '110 x 110 x 10', '110 x 110 x 12', '110 x 110 x 16', '130 x 130 x 8', '130 x 130 x 10', '130 x 130 x 12', '130 x 130 x 16', '150 x 150 x 10', '150 x 150 x 12', '150 x 150 x 16', '150 x 150 x 20', '200 x 200 x 12', '200 x 200 x 16', '200 x 200 x 20', '200 x 200 x 25', '50 x 50 x 7', '50 x 50 x 8', '55 x 55 x 10', '60 x 60 x 10', '65 x 65 x 10', '70 x 70 x 7', '100 x 100 x 7', '100 x 100 x 15', '120 x 120 x 8', '120 x 120 x 10', '120 x 120 x 12', '120 x 120 x 15', '130 x 130 x 9', '150 x 150 x 15', '150 x 150 x 18', '180 x 180 x 15', '180 x 180 x 18', '180 x 180 x 20', '200 x 200 x 24', '30 x 20 x 3', '30 x 20 x 4', '30 x 20 x 5', '40 x 25 x 3', '40 x 25 x 4', '40 x 25 x 5', '40 x 25 x 6', '45 x 30 x 3', '45 x 30 x 4', '45 x 30 x 5', '45 x 30 x 6', '50 x 30 x 3', '50 x 30 x 4', '50 x 30 x 5', '50 x 30 x 6', '60 x 40 x 5', '60 x 40 x 6', '60 x 40 x 8', '65 x 45 x 5', '65 x 45 x 6', '65 x 45 x 8', '70 x 45 x 5', '70 x 45 x 6', '70 x 45 x 8', '70 x 45 x 10', '75 x 50 x 5', '75 x 50 x 6', '75 x 50 x 8', '75 x 50 x 10', '80 x 50 x 5', '80 x 50 x 6', '80 x 50 x 8', '80 x 50 x 10', '90 x 60 x 6', '90 x 60 x 8', '90 x 60 x 10', '90 x 60 x 12', '100 x 65 x 6', '100 x 65 x 8', '100 x 65 x 10', '100 x 75 x 6', '100 x 75 x 8', '100 x 75 x 10', '100 x 75 x 12', '125 x 75 x 6', '125 x 75 x 8', '125 x 75 x 10', '125 x 95 x 6', '125 x 95 x 8', '125 x 95 x 10', '125 x 95 x 12', '150 x 115 x 8', '150 x 115 x 10', '150 x 115 x 12', '150 x 115 x 16', '200 x 100 x 10', '200 x 100 x 12', '200 x 100 x 16', '200 x 150 x 10', '200 x 150 x 12', '200 x 150 x 16', '200 x 150 x 20', '40 x 20 x 3', '40 x 20 x 4', '40 x 20 x 5', '60 x 30 x 5', '60 x 30 x 6', '60 x 40 x 7', '65 x 50 x 5', '65 x 50 x 6', '65 x 50 x 7', '65 x 50 x 8', '70 x 50 x 5', '70 x 50 x 6', '70 x 50 x 7', '70 x 50 x 8', '75 x 50 x 7', '80 x 40 x 5', '80 x 40 x 6', '80 x 40 x 7', '80 x 40 x 8', '80 x 60 x 6', '80 x 60 x 7', '80 x 60 x 8', '90 x 65 x 6', '90 x 65 x 7', '90 x 65 x 8', '90 x 65 x 10', '100 x 50 x 6', '100 x 50 x 7', '100 x 50 x 8', '100 x 50 x 10', '100 x 65 x 7', '120 x 80 x 8', '120 x 80 x 10', '120 x 80 x 12', '125 x 75 x 12', '135 x 65 x 8', '135 x 65 x 10', '135 x 65 x 12', '150 x 75 x 9', '150 x 75 x 15', '150 x 90 x 10', '150 x 90 x 12', '150 x 90 x 15', '200 x 100 x 15', '200 x 150 x 15', '200 x 150 x 18'
---------------	--



Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.1
Date	18 /12 /2020	Client	S R Satish Kumar, Professor, IIT Madras

2 Design Checks

Design Status	Pass
---------------	------

2.1 Selected Member Data

	Section Size*		('70 x 45 x 10', 'Angles')	
	Material		E 250 (Fe 410 W)A	
	Mass, m (kg/m)		8.31	
	Area, A (cm ²)		1050.0	
	A (mm)	70.0	I_v (cm ⁴)	9.81
	B (mm)	45.0	r_z (cm)	2.17
	t (mm)	10.0	r_y (cm)	1.23
	R_1 (mm)	6.5	r_u (cm)	2.3
	R_2 (mm)	0.0	r_v (cm)	0.96
	C_y (mm)	12.5	Z_z (cm ³)	11.0
	C_z (mm)	24.9	Z_y (cm ³)	4.91
	I_z (cm ⁴)	50.0	Z_{pz} (cm ³)	19.7
	I_y (cm ⁴)	16.0	Z_{py} (cm ³)	9.22
	I_u (cm ⁴)	56.2	Radius of gyration, r (cm)	9.6

2.2 Member Check

Check	Required	Provided	Remarks
Tension Yielding Capacity (kN)		$T_{dg} = \frac{A_g f_y}{\gamma_{mo}}$ $= \frac{1050.0 \times 250}{1.1 \times 10^3}$ $= 238.64$ <p>[Ref. IS 800 : 2007, Cl. 6.2]</p>	



Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.1
Date	18 /12 /2020	Client	S R Satish Kumar, Professor, IIT Madras

Check	Required	Provided	Remarks
Tension Rupture Capacity (kN)		$\beta = 1.4 - 0.076 \times \frac{w}{t} \times \frac{f_y}{0.9f_u} \times \frac{b_s}{L_c}$ $\leq \frac{0.9 f_u \gamma_{m0}}{f_y \gamma_{m1}} \geq 0.7$ $= 1.4 - 0.076 \times \frac{45.0}{10.0} \times \frac{250}{0.9 \times 410} \times \frac{45.0}{237}$ $\leq \frac{0.9 \times 410 \times 1.1}{250 \times 1.25} \geq 0.7$ $= 1.36$ $T_{dn} = 1 \times \left(\frac{0.9 A_{nc} f_u}{\gamma_{m1}} + \frac{\beta A_{go} f_y}{\gamma_{m0}} \right)$ $= 1 \times \left(\frac{0.9 \times 600.0 \times 410}{1.25} + \frac{1.36 \times 450.0 \times 250}{1.1} \right)$ $= 316.21$ <p>[Ref. IS 800 : 2007, Cl. 6.3.3]</p>	
Tension Capacity (kN)	235.0	$T_d = \min(T_{dg}, T_{dn})$ $= \min(238.64, 316.21)$ $= 238.64$ <p>[Ref. IS 800 : 2007, Cl. 6.1]</p>	Pass
Slenderness	$\frac{KL}{r} \leq 400$	$\frac{KL}{r} = \frac{1 \times 2560.0}{9.6}$ $= 266.67$ <p>[Ref. IS 800 : 2007, Cl. 7.1.2]</p>	Pass
Utilization Ratio	≤ 1	$Utilization Ratio = \frac{F}{T_d} = \frac{235.0}{238.64}$ $= 0.98$	



Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.1
Date	18 /12 /2020	Client	S R Satish Kumar, Professor, IIT Madras

Check	Required	Provided	Remarks
Axial Load Considered (kN)	$Ac_{min} = 0.3A_c$ $= 0.3 \times 238.64$ $= 71.59$ $Ac_{max} = 238.64$ [Ref. IS 800 : 2007, Cl. 10.7]	$A = 235.0$	Pass

2.3 Weld Design

Check	Required	Provided	Remarks
Min. Weld Size (mm)	t_{wmin} based on thinner part $= 10$ or 7 s_{min} based on thicker part = 5 [Ref IS 800 : 2007, Table 21 (Cl. 10.5.2.3)]	7	Pass
Max. Weld Size (mm)	$Thickness$ of thinner part $= \min(16.0, 10.0) = 10.0$ $s_{max} = 16.0$ [Ref. IS 800 : 2007, Cl. 10.5.3.1]	7	Pass
Throat Thickness (mm)	$t_t \geq 3$ [Ref. IS 800 : 2007, Cl. 10.5.3.1]	$t_t = 0.7t_w$ $= 0.7 \times 7$ $= 4.9$ [Ref. IS 800 : 2007, Cl. 10.5.3.1]	Pass
Effective Length (mm)		$l_w = 500.0$	



Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.1
Date	18 /12 /2020	Client	S R Satish Kumar, Professor, IIT Madras

Check	Required	Provided	Remarks
Weld Strength (N/mm)	$R_w = \sqrt{(A_{wh})^2 + (V_{wv})^2}$ $V_{wv} = \frac{V}{l_w} = \frac{0.0}{500.0}$ $A_{wh} = \frac{A}{l_w} = \frac{235000.0}{500.0}$ $R_w = \sqrt{(470.0)^2 + (0.0)^2}$ $= 470.0$	$f_w = \frac{t_t f_u}{\sqrt{3} \gamma_{mw}}$ $= \frac{4.9 \times 410}{\sqrt{3} \times 1.5}$ $= 773.26$ [Ref. IS 800 : 2007, Cl. 10.5.7.1.1]	Pass
Weld Strength (post long joint) (N/mm)	<p>if $l \geq 150t_t$ then $V_{rd} = \beta_{lw} V_{db}$</p> <p>if $l < 150t_t$ then $V_{rd} = V_{db}$</p> <p>where,</p> <p>$l = pt.length \text{ or } pt.height$</p> $\beta_{lw} = 1.2 - \frac{(0.2l)}{(150t_t)}$ <p>but $0.6 \leq \beta_{lw} \leq 1.0$</p> [Ref. IS 800 : 2007, Cl. 10.5.7.3]	$l = pt.length \text{ or } pt.height$ $l_t = \max(100.0, 252)$ $= 252$ $150t_t = 150 \times 4.9 = 735.0$ <p>since, $l < 150t_t$</p> <p>then $f_{wrd} = f_w$</p> $f_{wrd} = 773.26$ [Ref. IS 800 : 2007, Cl. 10.5.7.3]	
Weld Strength (N/mm)	470.0	773.26	Pass

2.4 Gusset Plate Check

Check	Required	Provided	Remarks
Tension Yielding Capacity (kN)	235.0	$T_{dg} = \frac{A_g f_y}{\gamma_{mo}}$ $A_g = l \times t = 200.0 \times 16.0$ $= \frac{3200.0 \times 250}{1.1 \times 10^3}$ $= 254.55$ [Ref. IS 800 : 2007, Cl. 6.2]	Pass




Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.1
Date	18 /12 /2020	Client	S R Satish Kumar, Professor, IIT Madras

Check	Required	Provided	Remarks
Min.Height (mm)		$H = 1 \times \text{Depth} + \text{clearance}$ $= (1 \times 200.0) + 30$ $= 100.0$	
Min.Plate Length (mm)		$L = \text{Flangeweld} + \text{clearance}$ $= 222 + 30$ $= 252$	Pass
Min.Member Length (mm)	504	2560.0	Pass
Thickness (mm)		$T = 16.0$	
Weld Strength (N/mm)	$R_w = \sqrt{(A_{wh})^2 + (V_{wv})^2}$ $V_{wv} = \frac{V}{l_w} = \frac{0.0}{500.0}$ $A_{wh} = \frac{A}{l_w} = \frac{235000.0}{500.0}$ $R_w = \sqrt{(470.0)^2 + (0.0)^2}$ $= 470.0$	$f_w = \frac{t_t f_u}{\sqrt{3} \gamma_{mw}}$ $= \frac{4.9 \times 410}{\sqrt{3} \times 1.5}$ $= 773.26$ [Ref. IS 800 : 2007, Cl. 10.5.7.1.1]	Pass
Block Shear Capacity (kN)		$T_{dbl1} = \frac{A_{vg} f_y}{\sqrt{3} \gamma_{m0}} + \frac{0.9 A_{tn} f_u}{\gamma_{m1}}$ $T_{dbl2} = \frac{0.9 A_{vn} f_u}{\sqrt{3} \gamma_{m1}} + \frac{A_{tg} f_y}{\gamma_{m0}}$ $T_{db} = \min(T_{db1}, T_{db2}) = 899.04$ [Ref. IS 800 : 2007, Cl. 6.4]	
Tension Capacity (kN)	$A = 235.0$	$T_d = \min(T_{dg}, T_{db})$ $= \min(254.55, 899.04)$ $= 254.55$ [Ref. IS 800 : 2007, Cl. 6.1]	Pass



Company Name	IIT Bombay	Project Title	Sample Member Design
Group/Team Name	Osdag	Subtitle	Tension Member Welded
Designer	Engineer #1	Job Number	2.2.1
Date	18 /12 /2020	Client	S R Satish Kumar, Professor, IIT Madras

3 3D Views

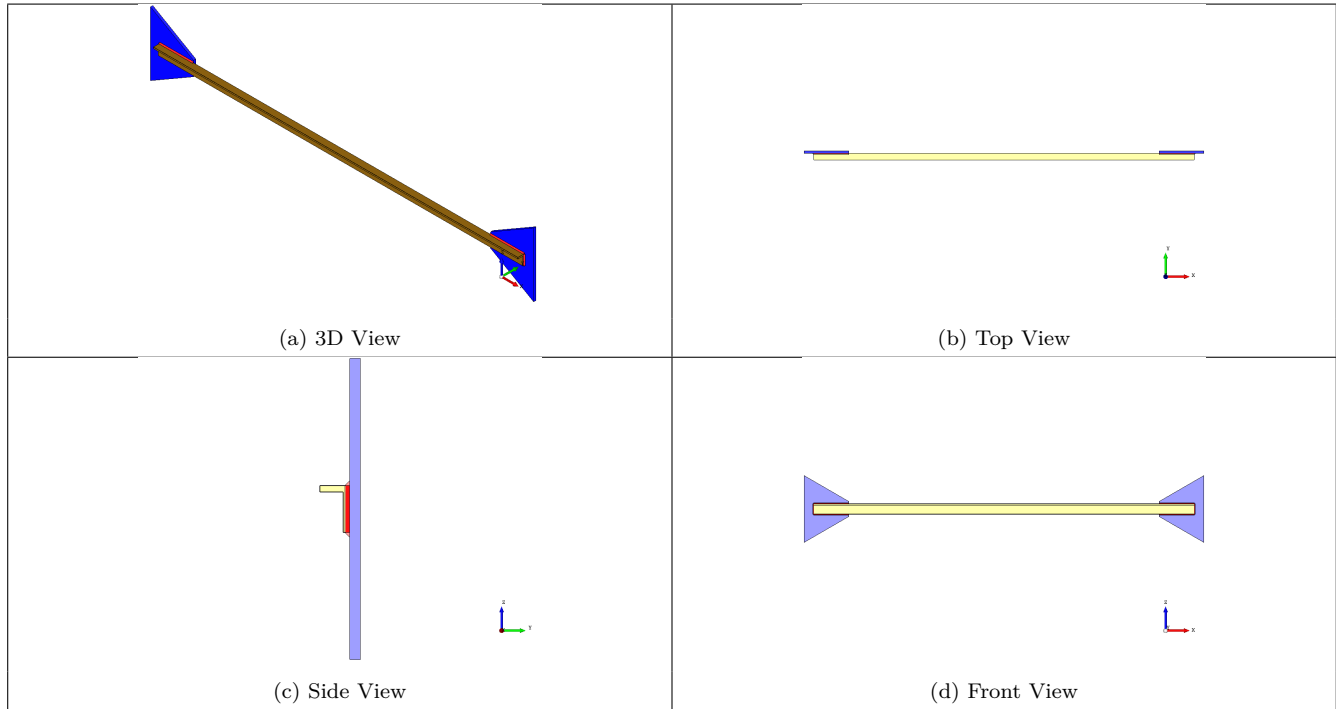

4 Design Log

02:04:27 - osdag - INFO - :In the case of reverse loading, slenderness value shall be less than 180 [Ref. Table 3, IS 800:2007].

02:04:27 - osdag - INFO - Size of weld is calculated based on the edge type i.e. square edge or round edge (IS 800:2007 Clause 10.5)).

02:04:27 - osdag - INFO - :Overall welded tension member design is safe.